


## Medical Double-Coated Tape

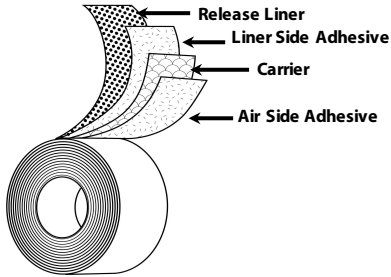

- Liner:** 74# Polycoated Kraft  
also available with 55# PC KFT Liner
- Liner Side Adhesive:** Medical-Grade Acrylic (M129)
- Backing/Carrier:** 0.5 mil PET Film
- Air Side Adhesive:** Medical-Grade Acrylic (M129)

### Applications

- Lamination and bonding to papers, rigid and flexible plastics, non-wovens, and foams
- Medical device attachment and assembly

### Features

### Benefits

- |  |  |
|--|--|
| <ul style="list-style-type: none"> <li>• Acrylic Adhesive</li> <li>• Polyester Film Carrier</li> <li>• 74# Polycoated Kraft Liner</li> </ul> | <ul style="list-style-type: none"> <li>• High peel and high tack</li> <li>• Bonds to a variety of substrates</li> <li>• Die-cuts cleanly</li> <li>• Support for aid in processing and application</li> <li>• Conformable</li> <li>• Good lay-flat; moisture resistant</li> </ul> |
|--|--|

### Typical Test Values

	Standard UOM	Metric UOM	Test Method
<b>Overall Thickness (w/liner)</b>	8.6 mils	0.218 mm	PSTC 133
<b>Air-Side Adhesive Thickness</b>	1.3 mils	0.033 mm	PSTC 133
<b>Carrier Thickness</b>	0.5 mils	0.013 mm	PSTC 133
<b>Liner Side Adhesive Thickness</b>	1.3 mils	0.033 mm	PSTC 133
<b>Liner Thickness (74# PC)</b>	5.5 mils	0.140 mm	PSTC 133
<b>Adhesion to Steel (Air Side)</b>	44 oz/in	4.81 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Steel (Liner Side)</b>	44 oz/in	4.81 N/cm	PSTC 101 Mod - 1 mil PET
<b>Adhesion to Steel (Air Side)</b>	70 oz/in	7.66 N/cm	PSTC 101 Mod - 4 mil Alu Foil
<b>Adhesion to Steel (Liner Side)</b>	70 oz/in	7.66 N/cm	PSTC 101 Mod - 4 mil Alu Foil
<b>Shear Strength</b>	7+ Days		PSTC 107 Mod
<b>Laminating Temperature</b>	68 to 100 °F	20 to 38 °C	
<b>Service Temperature</b>	-30 to 220 °F	-34 to 104 °C	

### Product Safety

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, non-irritating, and hypoallergenic.

In accordance with FDA cGMP requirements, Berry Global reminds the customer that ultimate fitness for use must be determined by the manufacturer of the finished device.

Recommended Storage Conditions: 40-60% Humidity, 60 °F - 80 °F

Standard Shelf Life: 12 months from date of shipment

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.