

# HITHERM™ HT-C3200 Thermal Interface Material

## TECHNICAL DATA SHEET 319

### Product Overview

eGRAF® HITHERM™ HT-C3200 thermal interface materials are designed for use in applications requiring reliable performance, low contact resistance, long life, low maintenance and high thermal conductivity. The flexible graphite materials is die-cut to ensure exact fit and reduce module-to-module variation during assembly. The compressibility of the material improves surface contact, reducing thermal impedance and can compensate up to 125µ of flatness variation between the contact surfaces while the high in-plane thermal conductivity reduces hot spots.

### Applications


Power modules such as IGBT, RF devices used in:

- UPS and inverters
- Motor drives
- Base stations / Telecommunication
- Thermo Electric Devices
- Power supply modules, rectifiers and chargers
- High performance computers and servers
- EV / HEV / PHEV modules

### Typical Properties at Room Temperature<sup>[1]</sup>


CHARACTERISTIC	UNIT	TYPICAL VALUE
Thermal Impedance @ 200 kPa (29 psi)	K-cm <sup>2</sup> /W	0.49
Thermal Impedance @ 700 kPa (101 psi)	K-cm <sup>2</sup> /W	0.18
Typical Thermal Conductivity <sup>[2]</sup> @ 700 kPa Through-Plane • In-Plane	W/m-K	7 • 800
Typical Starting Thickness	µm inches	200 ± 20 0.008 ± 0.001
Coefficient of Thermal Expansion Through-Thickness • In-Plane	ppm/°C	27 • -0.4
Electrical Conductivity Through-Thickness • In-Plane	S/cm	5 • 19,000
Flammability Rating (UL)	94V-0	Compliant
Operating Temperature	°C	-40 to +400
Specific Heat @ 25°C	J/g-°C	0.80
RoHS Compliant	-	Yes
Halogen Free	-	Yes

**THERMAL IMPEDANCE VS. INTERFACE PRESSURE**

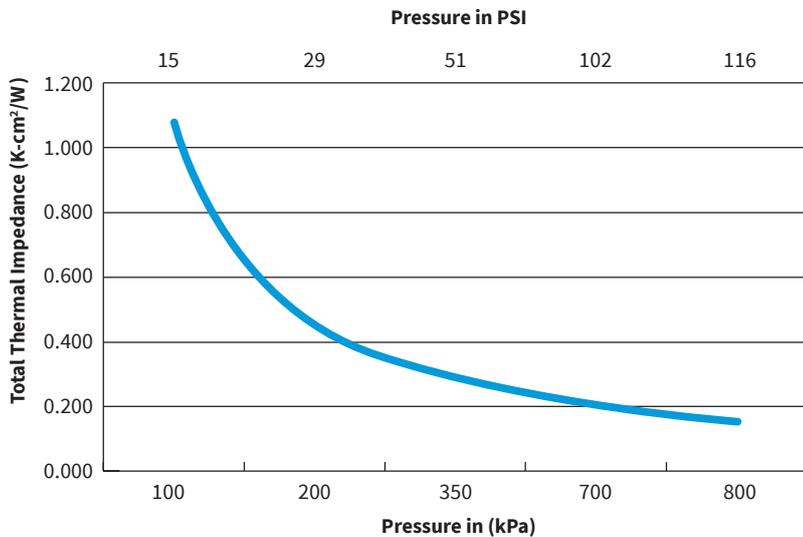

Thermal impedance reduces significantly with pressure, ensuring excellent performance in pressure ranges common for most standard modules and power electronic devices per manufacturer’s application guide.

**THICKNESS UNDER COMPRESSION**

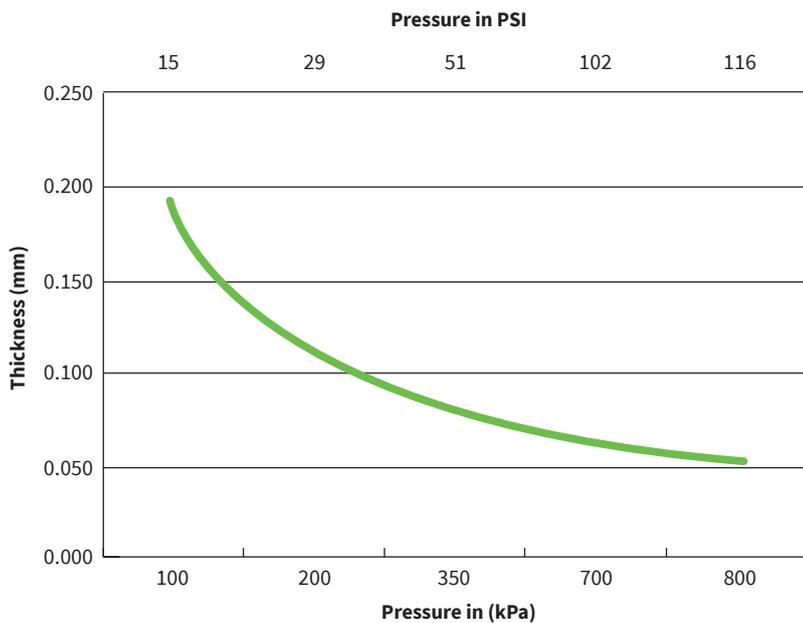

Material compressibility improves contact between the mating surfaces, adjusting for flatness and roughness variations, ensuring reliable performance.

Notes:

- [1] Properties listed are typical and cannot be used as accept/reject specifications.
- [2] In-Plane conductivity at ambient temperature determined using Angstrom’s Method.  
Thru-thickness conductivity determined using ASTM D5470 Modified Method.

+1 (800) 253.8003 (Toll-Free in USA) | +1 (216) 529.3777 (International)  
www.neograp.com | info@neograp.com

©2018 NeoGraf Solutions, LLC (NGS). This information is based on data believed to be reliable, but NGS makes no warranties, express or implied, as to its accuracy and assumes no liability arising out of its use. The data listed falls within the normal range of product properties, but should not be used to establish specification limits or used alone as the basis of design. NGS’s liability to purchasers is expressly limited to the terms and conditions of sale. eGRAF®, GRAFGUARD® and GRAFOIL® are registered trademarks of NeoGraf Solutions, LLC. eGRAF®, GRAFGUARD® and GRAFOIL® products, materials, and processes are covered by several US and foreign patents. For patent information visit www.neograp.com.