



FT 8413 PG


Avery Dennison™ FT 8413 PG is excellent for applications requiring good adhesion and high shear performance. The tape adheres well to a variety of different substrates. Used in packaging applications.

FEATURES

- Aggressive, high-tack, rubber based adhesive
- Excellent shear properties; room & elevated temperatures
- Polyester carrier and densified kraft suitable for die cutting

BENEFITS

- Strong bond to a variety of substrates
- Product reliability
- Excellent adhesion to paper stock and corrugated substrates
- Good cohesive strength adhesive
- Improved cold temperature tack

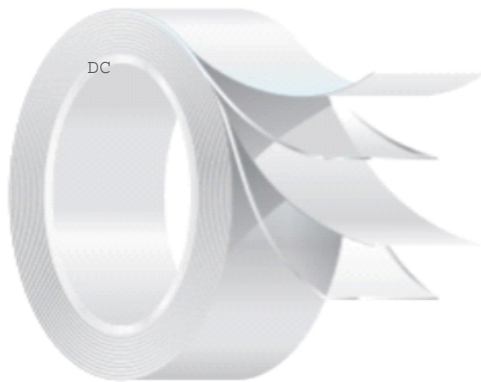

CONSTRUCTION:

Liner:

50# White Kraft

Adhesive 1:

Rubber

Carrier:

Polyester

Adhesive 2:

Rubber

FT 8413 PG

Adhesive Properties:

Thickness	ASTM D3652	Typical Values		
		US Mils	MM's	Micron's (µm)
Liner		2.5	0.06	64
Adhesive 1 - Liner		2.4	0.06	61
Carrier		0.5	0.01	13
Adhesive 2 - Unwind		2.4	0.06	61
Total Caliper without Liner:		5.3	0.13	135
Total Caliper:		7.8	0.20	198

Peel Adhesion ASTM D3330

180° 12 in (305 mm) / min

Substrate	Liner	Initial	Lbf / In	N / Meter
			SS	
	Unwind		8.5	1,497

Loop Tack ASTM D6195

180° 20 in (508 mm) / min

Substrate	Liner	Initial	Lbf / In	N / Meter
			SS	
	Unwind		13.0	2,289

Static Shear ASTM D3654

180° 1" sq (6.5 cm²) 2500 g @ Room Temp

Substrate	Liner	Initial	Mins to Fail	
			SS	
	Unwind		> 10,000	

TEMPERATURES	° F	° C
Minimum Application Temperature	50° F	10° C
Maximum Continuous Operating Temperature	200° F	93° C
Maximum Intermittent Operating Temperature	225° F	105° C

THE LISTED VALUES ARE TYPICAL AND NOT INTENDED TO SERVE AS PRODUCT SPECIFICATIONS

APPLICATION TECHNIQUES

- It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied be clean, dry, and free of grease or oil
- Bond strength is dependent upon the amount of adhesive-to-surface contact developed
- Note that different pressure, time and temperature on different (film / rigid) surface achieves different performance

STORAGE / SHELF LIFE

- One year when stored at 64-72°F (18-22°C) / 30-70% relative humidity, out of direct sunlight and in original packaging.

Please refer to Tapes.AveryDennison.com for complete terms and conditions, including warranty terms, relating to this product. You should periodically review the site as terms and conditions are subject to change without notice.

© 2020 Avery Dennison Corporation. All rights reserved. Avery Dennison® is a registered trademark of Avery Dennison Corporation. All other Avery Dennison brands, product names, antenna designs and codes or service programs are trademarks of Avery Dennison Corporation.



Asia Pacific
Kunshan, China,
NO. 618 Nanhe Road
Kunshan Economic &
Technological Zone
China, 215335
Phone: +86 512 57155001
Fax: +86 512 57155059

Europe
Tieblokkenlaan 1
B-2300 Turnhout
Belgium
Phone: +32 (0)14 40 48 11
Fax: +32 (0)14 40 48 55

North America
250 Chester Street
Painesville, Ohio
44077 USA
Phone: +1 866-462-8379
Fax: +1 888-358-4469