

1332

1/32" BLACK POLYETHYLENE DOUBLE COATED FOAM TAPE

PRODUCT DESCRIPTION


Double Coated Tape

1332 is a 1/32" thick black closed cell, crosslinked polyethylene foam coated on both sides with a high performance rubber based adhesive. The product is supplied on a white glassine paper liner.

FEATURES & BENEFITS

- High shear adhesive provides superior holding
- Great immediate bond
- Easily die cut
- Low compression set
- Certified to UL746C: Polymeric Adhesive Systems, Electrical Equipment - Component

PRODUCT CONSTRUCTION

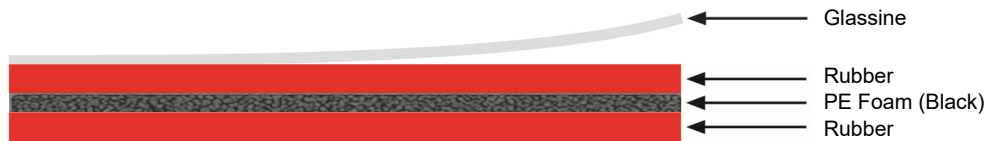

PRODUCT SPECIFICATIONS

Test	Typical Value		Typical Value (Metric)		Test Method
Product Thickness (Total)	35.25	mils	0.895	mm	PSTC-133
Adhesive Thickness (Liner Side)	2.00	mils	0.051	mm	PSTC-133
Carrier Thickness	31.25	mils	0.794	mm	PSTC-133
Adhesive Thickness (Exposed Side)	2.00	mils	0.051	mm	PSTC-133
Peel Adhesion	111*	oz/in	30.84	N/25mm	PSTC-101
Tack	38	oz	1077	g	ASTM D 2979
Shear Adhesion	>168	hrs @ 2.2 psi	>168	hrs @15.2 kPa	PSTC-107
Normal Tensile	56	psi	39	N/cm ²	
Minimum Service Temperature	-20	°F	-29	°C	
Maximum Service Temperature	160	°F	71	°C	

Tested values are typical under standard conditions and are not intended to be used for specification development. Technical data is believed to be true and accurate; Adhesive Applications recommends that the purchaser test for performance and fitness of use in all applications.

* Peel Adhesion max value is recorded as a result of foam destruction during test

Adhesive Applications - The Adhesive Solutions Company

41 O'Neill Street
Easthampton, MA 01027

413-527-7120 Main
800-356-3572 Toll Free U.S.

www.adhesiveapps.com

Adhesive
Applications™

02-Aug-22

