


POLYKEN®

Medical Pressure-Sensitive Tapes

3428M

Double-Coated Film Tape

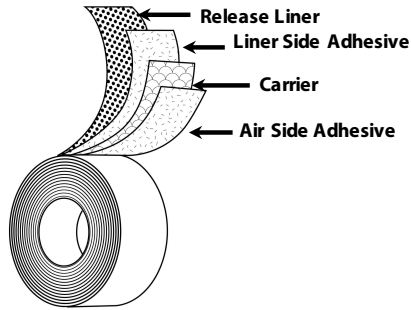

- Liner:** 80lb bleached, silicone release treated on both sides
- Liner Side Adhesive:** Non-irritating medical-grade acrylic (M119)
- Backing/Carrier:** 1.0 mil polyurethane film
- Air Side Adhesive:** Non-irritating medical-grade acrylic (M119)

Applications

- Toupee attachment
- Surgical drape fabrication and assembly
- Medical device assembly
- Surgical drape attachment: drape to drape, drape to skin
- Medical device attachment

Features

- Polyurethane Film Carrier
- Non-Irritating Acrylic Adhesive
- 80lb Release Liner

Benefits

- High breathability and conformability for extended wear and maximum patient comfort
- Excellent adhesion to skin and other surfaces
- Suitable for long-term wear
- Easy to use and convert

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness w/liner	9.4 mils	0.239 mm	PSTC 133
Adhesive Thickness (Air Side)	2.1 mils	0.053 mm	PSTC 133
Adhesive Thickness (Liner Side)	2.1 mils	0.053 mm	PSTC 133
Carrier Thickness	1.0 mils	0.025 mm	PSTC 133
Liner Thickness	4.2 mils	0.107 mm	PSTC 133
Adhesion to Steel (Air Side)	100 oz/in	10.94 N/cm	PSTC 101 Mod
Adhesion to Steel (Liner Side)	110 oz/in	12.03 N/cm	PSTC 101 Mod

Product Safety

The base adhesives in this medical product have been tested in accordance with ISO 10993 and found to be non-cytotoxic, and non-irritating.

In accordance with FDA cGMP requirements, Berry reminds the customer that ultimate fitness for use must be determined by the manufacturer of the finished device.

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY GLOBAL, INC. (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To BERRY's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryglobal.com
 12/20/17



Authorized Distributor,
 Converter, and Fabricator
 www.jbc-tech.com